

The World's Most Trusted Industrial Bolting Systems

HY-115/230 ELECTRIC PUMP


The HY-115/230 Hydraulic Power System operates at a very quiet 69 Db. All pumps are air-cooled and ready to handle extremely heavy workloads making overheating a thing of the past. A compact design with a one gallon tank alleviates weight restrictions and offer the operator efficient mobility. The user can ease his power restriction concerns thanks to extremely low amp draw and new voltage under/over built in protection meter. Simple controls make for short set-up times and with the automatic option the operators will experience faster and easier tightening.

MAIN FEATURES


- Equipped with Oilcooler
- Gauge psi/bar FS 1.0%
- Remote control 24V – 5 m length
- 4-Tool-Adapter

OPTIONS

- Semi-automatic (-A)
- Calibrated gauge with certificate
- Remote control 24V – 10 m length
- Documentation System

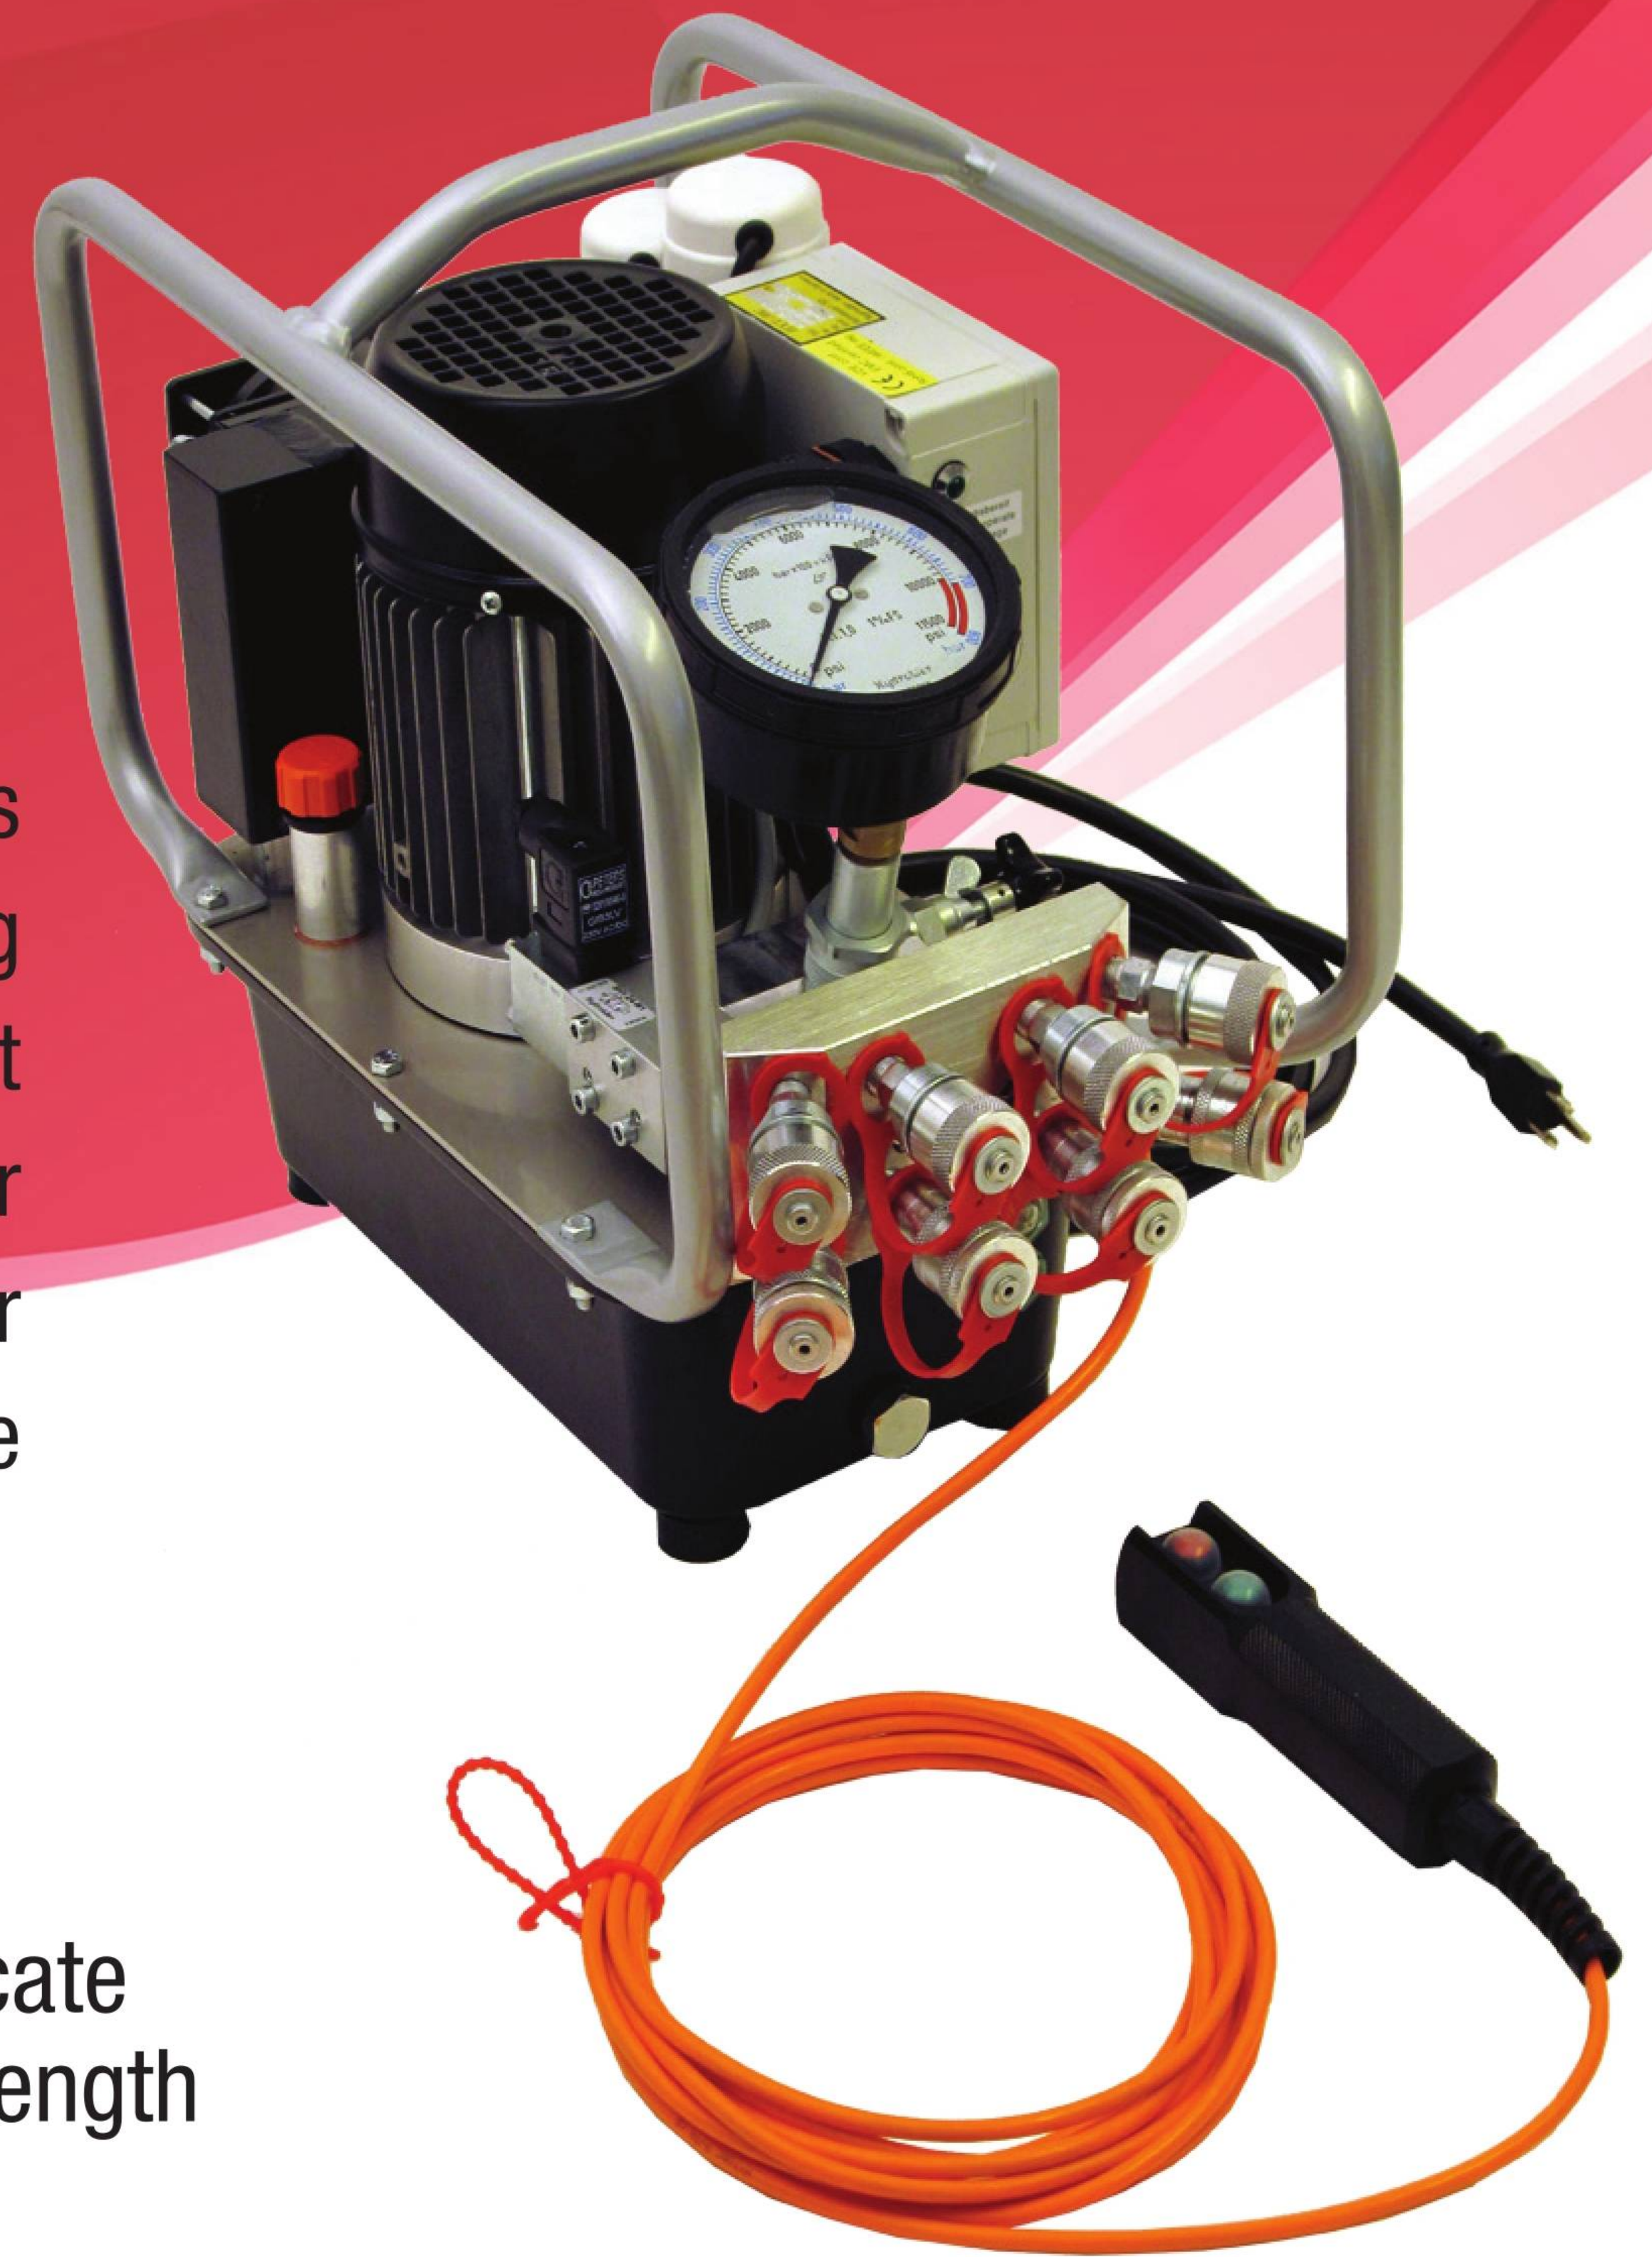

*Available in 1 or 2 gallon oil reservoir configurations

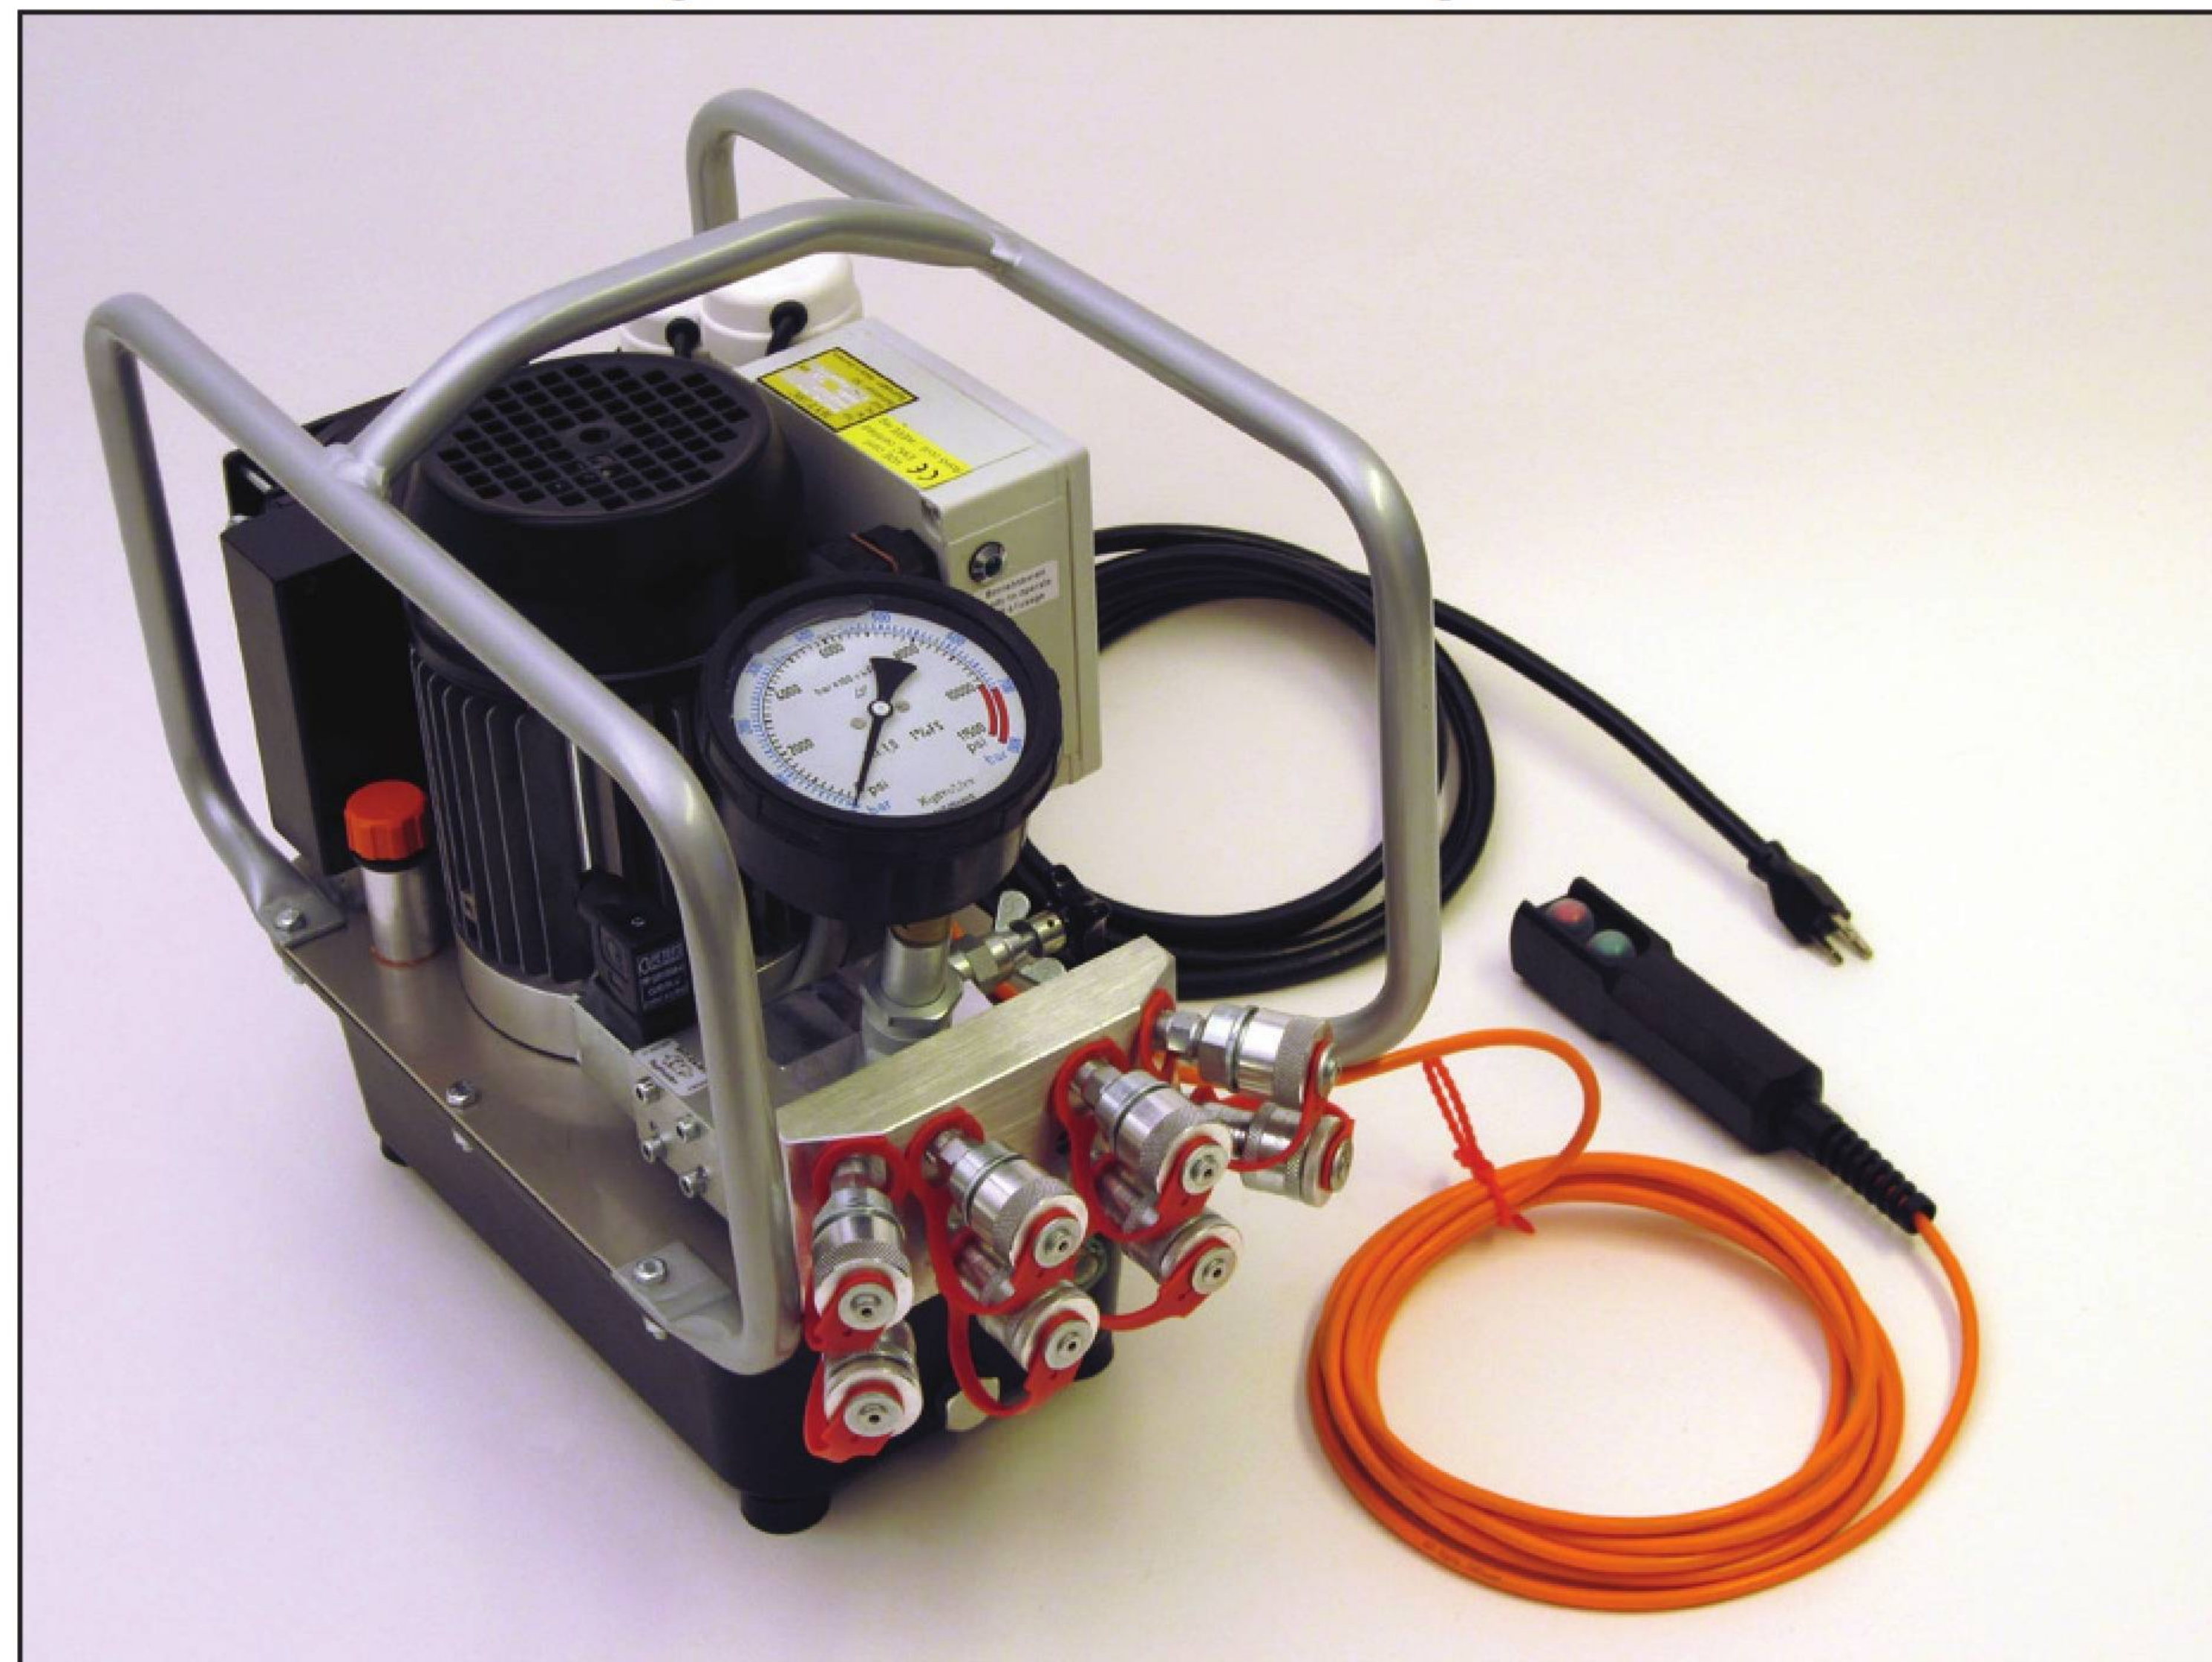

24 Hour SERVICE

713-453-6677

www.hytortexas.com

HYTORC®
Since 1968

12420 Texaco Rd., Houston, TX 77013

The HYSTREAM 115/230 Pump is now equipped with (3) three-colored LEDs integrated into the electric control box for system monitoring.

1st (upper) LED: LOW-VOLTAGE


- OVER 95V : GREEN
- 95V to 85V : YELLOW
- 85V to 75V : RED
- LESS THAN 75V : PUMP WILL SHUT DOWN

2nd (middle) LED: HIGH-VOLTAGE

- LESS THAN 120V : GREEN
- 120V to 125V : YELLOW
- 125V to 130V : RED
- OVER 130V : PUMP WILL SHUT DOWN

3rd (lower) LED: OIL & MOTOR TEMPERATURE

- LESS THAN 0° C/32° F : YELLOW; Advance/retract will be blocked, pump will heat oil up
- 0° C/32° F to 70° C/158° F : GREEN
- 70° C/158° F to 90° C/194° F : YELLOW
- OVER 90° C/194° F : RED, PUMP WILL COOL DOWN
- MOTOR OVER 175° C/347° F : PERMANENT RED, PUMP WILL COOL DOWN

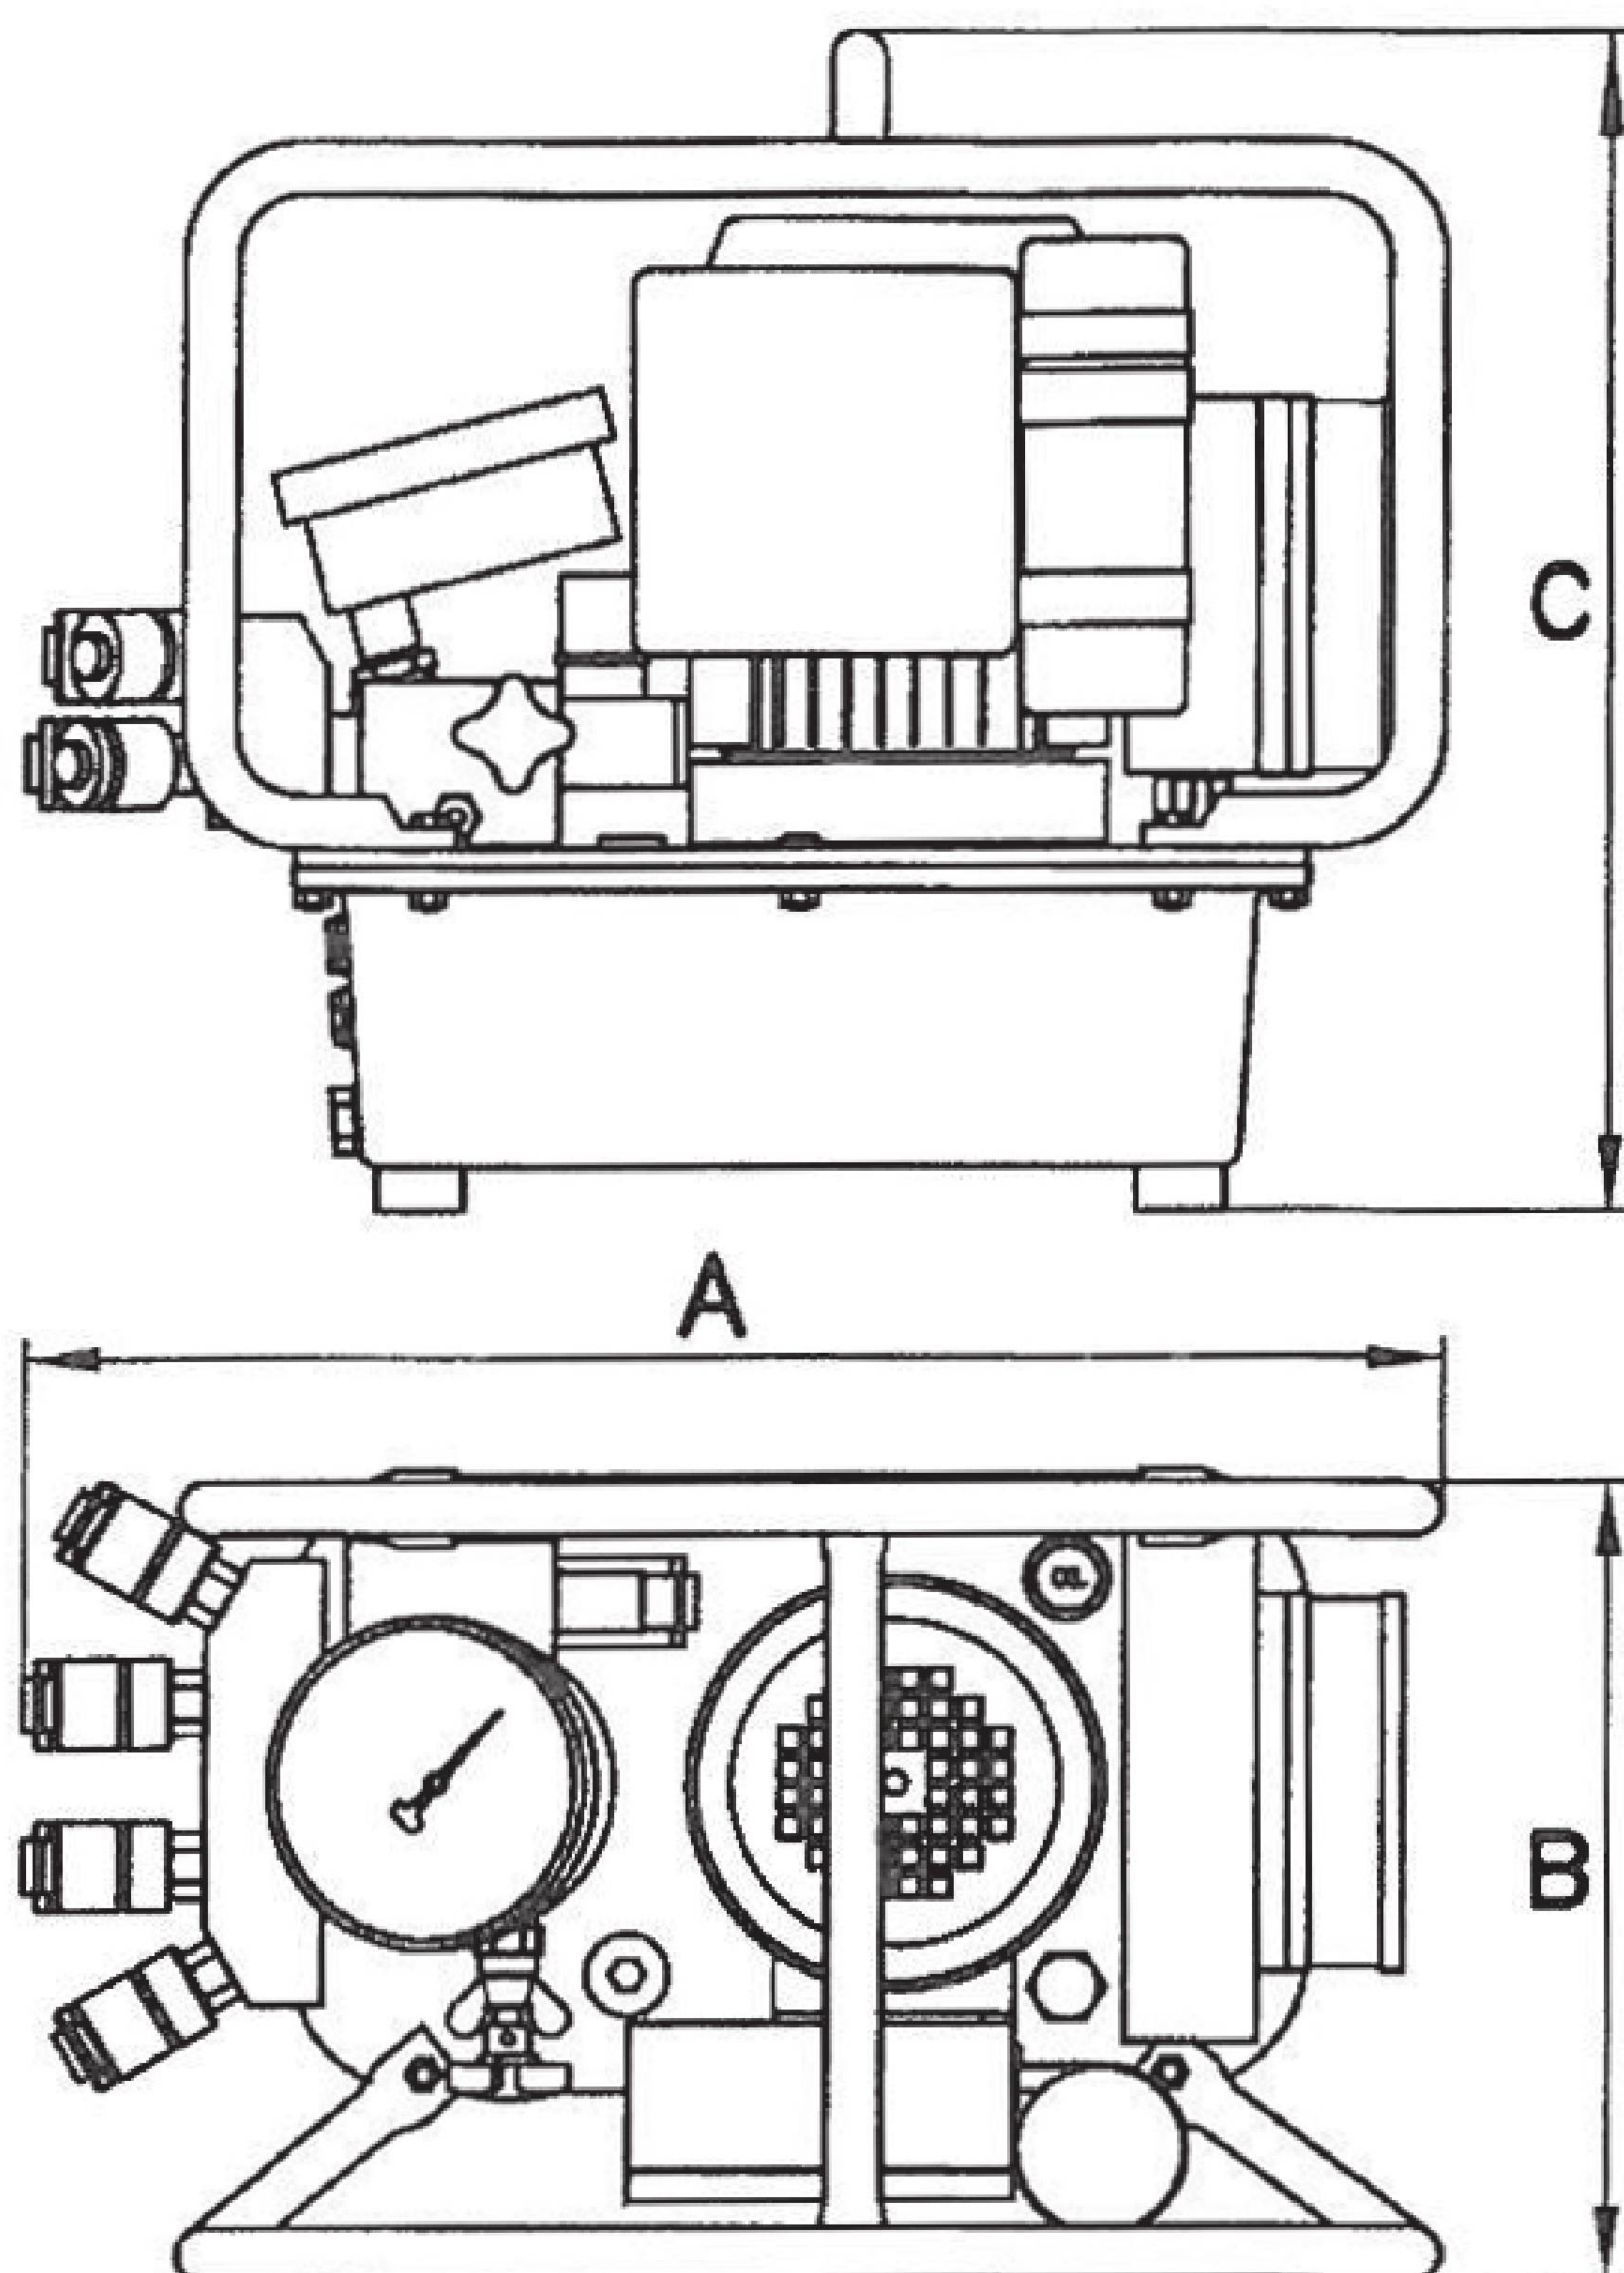

REQUIREMENT:

115V: 1Ph 100-115V / 50-60Hz
 230V: 1Ph 200-230V / 50-60Hz

POWER:

100-115V: 1.2 kW / 1.6 HP – 15 Amp
 200-230V: 1.2 kW / 1.6 HP – 7 Amp

DIMENSIONS:

A = 18.8" (480 mm)
 B = 11.0" (280 mm)
 C = 15.7" (400 mm)

WEIGHT:

57 lbs (26 kg) – without oil

OIL FLOW:

Max. oil flow: 770 cu.in./min (12,5 l/min.)
 up to 1 000 psi (bis 70 bar)

Middlepressure oil flow: 135 cu.in./min (2,2 l/min.)
 up to 4 200 psi (bis 300 bar)

Highpressure oil flow: 60 cu.in./min (1,0 l/min.)
 up to 10.000 psi (bis 700 bar)