

The World's Most Trusted Industrial Torque and Tension Systems





HY-AIR PNEUMATIC PUMP

MAIN FEATURES

- Protective Caging
- Light weight
- 3-Stage
- 4-Tool Adapter
- Gauge psi/bar FS 1.0%
- Remote control air – 5m length

OPTIONS

- Calibrated Gauge with Certificate
- 10m / 30ft Remote Control Cable
- Semi-Automatic (-A)
- Two gallon reservoir






24 Hour SERVICE

713-453-6677

www.hyorctexas.com

HYTORC®
Since 1968

12420 Texaco Rd., Houston, TX 77013

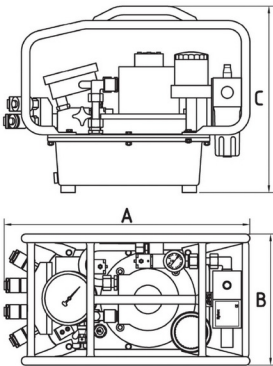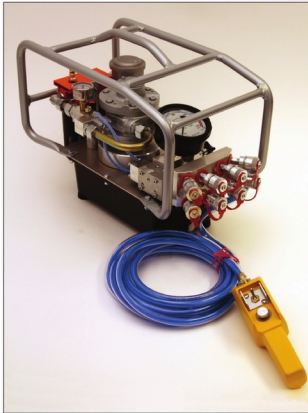

AIR CONSUMPTION:

400 – 1000 kPa / 60 l/sec.
 (4 – 10 bar)
 55 – 150 psi / 3800 cu.in/sec.

DIMENSIONS:

A = 20.4" (520 mm)
 B = 10.9" (275 mm)
 C = 15.5" (395 mm)

WEIGHT:

46.3 lbs (21 kg) – without oil

OIL FLOW:

Max. oil flow: 770 cu.in/min (12,5 l/min.)
 up to 1 000 psi (bis 70 bar)
 Middle pressure oil flow: 135 cu.in/min (2,2 l/min.)
 up to 4 200 psi (bis 300 bar)
 High pressure oil flow: 66 cu.in/min (1,0 l/min)
 up to 10.000 psi (bis 700 bar)